

# PG-4026A

## 26-Port L2 Managed Gigabit Switch



### Description

The PG-4026A Gigabit managed switches are the latest generation of switches to all of the features you need to create a basic business network that are easy-to-management and affordable. Provide a range of physical interface types, multiple easy-to-deploy management interfaces, and advanced Layer 2 features (which is working on Layer 2 of OSI model). PG-4026A helps provide a cost-efficient and flexible solution for building and expanding business networks. These switches can be deployed at the Enterprise's access level and in converged networks.

The PG-4026A support 24 ports with 10/100/1000BASE-T. In addition, PG-4026A support two gigabit SFP ports for optical connections using multi-mode or single-mode SFP transceivers. Through the front panel LED indicators, users can easily tell the network connection status directly from the indicators.

The PG-4026A provide high performance, powerful L2 and L2+ features like QoS, DHCP Snooping, advanced security protection and IP-MAC Access Control List (ACL) functions protect against broadcast storm, ARP and IGMP Snooping, etc. Providing huge flexibility base on workgroup performance improvement. Moreover, the easy to use web GUI interfaces and CLI, SNMP, SSH provide faster and easy setup and configuration with less downtime. PG-4026A provide a reliable, scalable, secure solution for small medium and campus, ISP networks.

The PG-4026A's important management commands, such as downloading firmware or a configuration file, offer a sophisticated method of batch operations for multiple switches.

LINK Network Switch makes it easy for your connectivity and it is the ideal device for bridging among Fast Ethernet, Gigabit Ethernet workgroups and networks.

### Features Highlight

#### Advanced Features

The PG-4026A comes equipped with a complete L2 features, including MAC Address administration, Loop Detection, Spanning Tree Protocol (STP) IGMP snooping (IGMP v1/v2/v3 Snooping), port mirroring with one-to-one and Many-to-one capabilities, IEEE 802.3ad Link Aggregation Control Protocol (LACP). The IEEE 802.3x Flow Control function allows servers to directly connect to the switch for fast, reliable data transfers.

Network maintenance and Troubleshooting features include loopback detection that significantly speeds up troubleshooting by automatically detecting and shutting down switching loops. The fiber port transceiver information feature, designed primarily for administrators, determines the fiber transceiver connection status, quality and quickly discovers errors.

The PG-4026A supports VLAN tagging, which allow the traffic to be automatically identified and handled differently to regular network traffic.

#### Connectivity

##### Support Auto-MDI/MDIX

Adjusts automatically to straight-through or crossover on all 10/100/1000 ports.

##### Packet storm protection (Storm Control)

Protects against broadcast, multicast, or unknown unicast (DLF) storms with user-defined thresholds.

##### IEEE 802.3x flow control

Provides a mechanics allowing the receiving party of a connection to control the rate of the sending party. As a result of this, the throughput of data streams destined to slow clients increases because packets are no longer discarded but the throughput of streams destined to fast clients is reduced considerably.

##### Jumbo frame supports up to 10 kilobytes frames

Enabling jumbo frames can improve network performance by making data transmissions more efficient. The CPUs on switches and routers can only process one frame at a time. By putting a larger payload into each frame, the CPUs have fewer frames to process. In return, this can reduce the amount of heat the network devices generate.

##### Port Mirroring

Port Mirroring, is a method of monitoring network traffic. With port mirroring enabled, the switch sends a copy of all network packets seen on one port (or an entire VLAN) to another port, where the packet can be analyzed.

## Features Highlight

### Network Security Features

- **Access Control Lists**  
A permission-based systems that assign people in an organization different levels of access to files and information. Allows for traffic filtering. ACLs rules can be based on MAC-address or IP-address. Support IPv4 and IPv6 based network.
- **IEEE 802.1X and RADIUS network authentication**  
Connect to Radius and controls port-based access for authentication and accountability.
- **Port Isolation**  
Port isolation allows a network administrator to prevent traffic from being sent between specific ports. This can be configured in addition to an existing VLAN configuration, so even client traffic within the same VLAN will be restricted.
- **Port Security**  
Port Security helps secure the network by preventing unknown devices from forwarding packets. When a link goes down, all dynamically learned addresses are freed. You can limit the number of MAC addresses on a given port. Packets that have a matching MAC address (secure packets) are forwarded; all other packets (insecure packets) are restricted.
- **ARP attack protection**  
ARP inspection is a security feature that rejects invalid and malicious ARP packets. The feature prevents a class of man-in-the-middle attacks, MAC flooding, where an unfriendly station intercepts traffic for other stations by poisoning the ARP caches of its unsuspecting neighbors. The miscreant sends ARP requests or responses mapping another station's IP address to its own MAC address. PSG-5008A also support ARP inspection rate-limit and ARP inspection validate.
- **STP BPDU port protection**  
Blocks Bridge Protocol Data Unit (BPDUs) on ports that do not require BPDUs, preventing forged BPDU attacks.
- **STP Root guard**  
Root Guard protects the Spanning Tree Protocol (STP) topology attack of replacing the original Root Bridge with a rogue Root Bridge. Protects the network by blocking malicious attacks or misconfiguration.
- **DHCP Snooping**  
DHCP Snooping is a layer 2 security technology incorporated into the operating system of a capable network switch that drops DHCP traffic determined to be unacceptable. DHCP Snooping prevents unauthorized (rogue) DHCP servers offering IP addresses to DHCP clients.
- **Port speed limit**  
Rate-limiting for all traffic operates on a per-port basis to allow only the specified bandwidth to be used for inbound or outbound traffic. When traffic exceeds the configured limit, it is dropped. This effectively sets a usage level on a given port and is a tool for enforcing maximum service level commitments granted to network users.
- **Management password**  
Provides security so that only authorized access to the web browser interface is allowed.
- **IP Source Guard**  
A security feature that restricts IP traffic on nonrouted, Layer 2 interfaces by filtering traffic based on the DHCP snooping and ARP Inspection.

### Performance

- **Speed duplex**  
Half/full-duplex with auto-negotiating capability on every port can double the throughput.
- **IGMP Snooping**  
Internet Group Management Protocol (IGMP) snooping constraints the flooding of IPv4 multicast traffic on VLANs on a device. It reduce flooding of packets and offer efficient managed of broadcast traffic by reducing network congestion.
- **Gigabit SFP Fiber ports**  
SFP ports enable Gigabit switches to connect to a wide variety of fiber and Ethernet cables in order to extend switching functionality throughout the network. Fiber is particularly suited for connecting at distance beyond 100 meter limitation of UTP cabling.

### Layer 2 switching

- **VLAN support**  
Supports IEEE 802.1Q with 4094 VLAN ID.
- **VLAN Type**  
Port-based VLAN, MAC-based VLAN, Access VLAN, Trunk VLAN, and Management VLAN.
- **Spanning Tree**  
Supports standard IEEE 802.1d Spanning Tree Protocol (STP), IEEE 802.1w Rapid Spanning-Tree Protocol (RSTP) for rapid convergence.
- **BPDU filtering**  
BPDU filter is a feature used to filter sending or receiving BPDUs on a switchport. It is extremely useful on those ports which are configured as portfast ports as there is no need to send or receive any BPDU messages on of these ports.

## Features Highlight

### Fine-grained Service Management

Beside basic port-based VLAN function, PS-4026A provides higher and flexible levels of VLAN configuration related to MAC and Protocol-based. While MAC-based comprises of defining a virtual network according to the MAC addresses of stations, the Protocol-based VLAN makes it possible to create a virtual network by protocol type. These features along with VLAN stacking enable ISPs to flexibly deliver services with extra security and separation. As a result, ISPs using PG-4026A can experience fine-grained service management fulfilling the requirements of their subscribers.

### Delivers Enhanced Ring/Path Redundancy and Bandwidth Aggregation


Short spans of missed communication due to link failures can have a negative impact on the network. Recovery and redundancy features are critical for networks handling heavy video and data traffic. Dual Homing, LACP and RSTP provide a highly reliable network with redundancy connections whenever required and guarantee continuous network uptime.

## Applications

Experience superior performance and massive bandwidths that deliver remarkable quality services

- ▶ Combination of basic Layer 3 and full-set of advanced Layer 2 features
- ▶ Gigabit bandwidths for complex high-speed networks
- ▶ Perfect for high ARPU

RJ45  
1000 Mbps Fiber  
10G Fiber

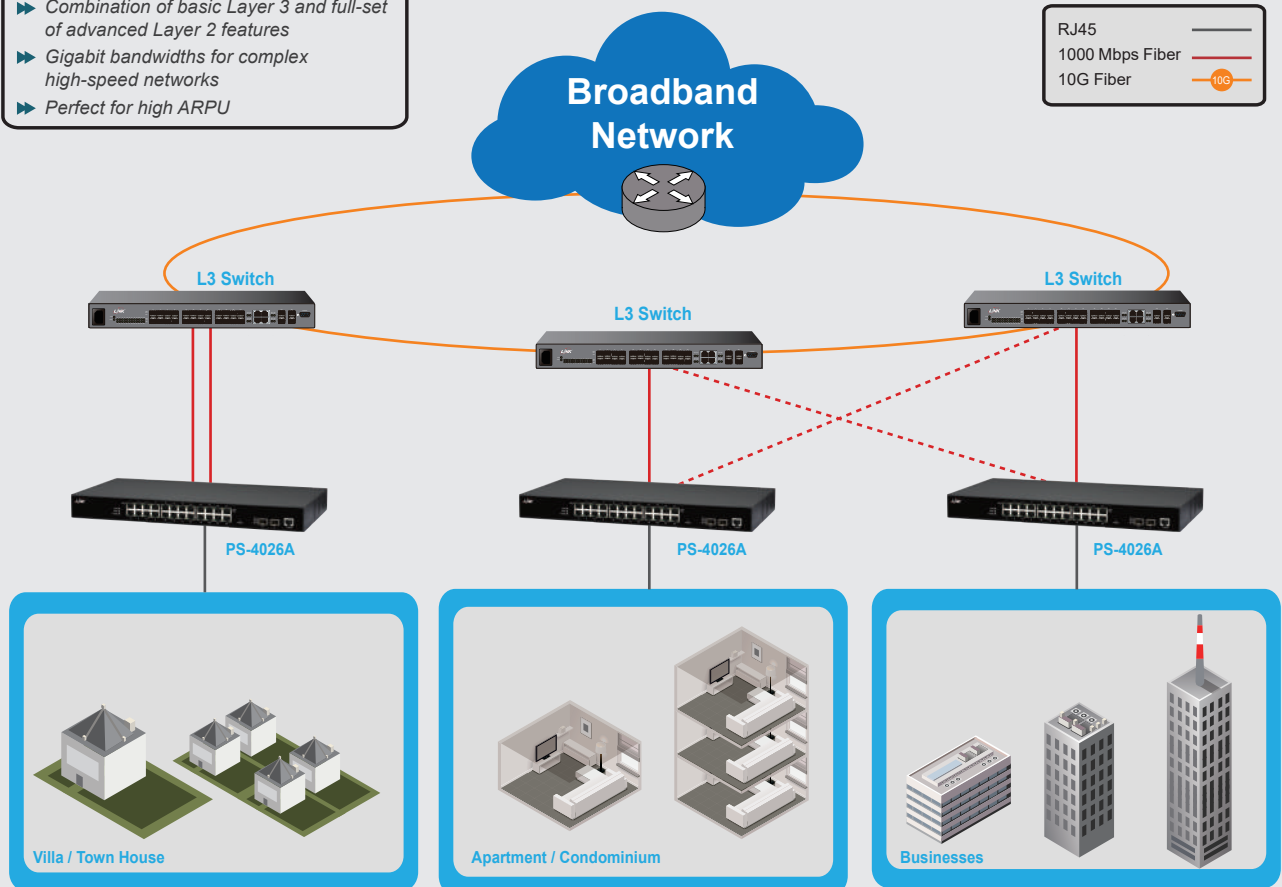

## Features Highlight

### Layer 3 services

#### ■ IPv4 and IPv6 Client

Simplifies management of DHCP addresses in IPv4 and IPv6 networks with multiple subnets.

#### ■ Address Resolution Protocol (ARP)

The job of the ARP is essentially to translate 32-bit addresses to 48-bit addresses and vice-versa. This is necessary because in IP Version 4 (IPv4), the most common level of Internet Protocol (IP) in use today, an IP address is 32-bits long, but MAC addresses are 48-bits long.

### Resiliency and high availability

#### ■ IEEE 802.3ad Link aggregation

Enables you to group Ethernet interfaces at the physical layer to form a single link layer interface, also known as a link aggregation group (LAG) or bundle in order to increase the bandwidth capability and to create resilient and redundant links. Link Aggregation also provides load balancing where the processing and communications activity is distributed across several links in a trunk so that no single link is overwhelmed.

#### ■ Enhance Ring/Path Redundancy

Short spans of missed communication due to link failures can have a negative impact on the network. Recovery and redundancy features are critical for networks handling heavy video and data traffic. Dual Homing and RSTP provide a highly reliable network with redundancy connections whenever required and guarantee continuous network uptime.

### Energy Saving

#### ■ IEEE 802.3az Energy-Efficient Ethernet (EEE)

EEE is very effective in reducing the total power consumed per port and it saves a lot of energy on the long run for organizations having a large number of network devices. EEE is very effective with edge devices (like computers, edge switches, etc.) and can save a lot of power when these devices are EEE compliant as their utilization pattern generally consists of long periods of silence and a few traffic bursts at (almost) full capacity.

#### ■ Energy Conservation design

Fanless design leads to a quiet operation. This passive thermal management becomes a cost-effective and energy-efficient solution for switches to maintain optimum operating temperature without causing much noise.

### Network Management

- Simplified WEB management interface on web browser allows for easy configuration and “user-friendly” management
- SNMPv1/v2c/v3
- RMON
- DHCP Client/Relay/Option 82
- Server Control
- SFP Info
- LLDP
- The MIB II
- Ethernet MIB

### Equipment Management

- Console port
- Telnet/SSH
- CLI Interface
- Web GUI
- System Information
- System Log (support Syslog, SNMP Trap)
- System Firmware Upgrade
- SNTP
- HTTP/HTTPS

## Specifications

Standards	
IEEE 802.3	10Base-T (Ethernet)
IEEE 802.3u	100Base-TX/FX (Fast Ethernet)
IEEE 802.3ab	1000Base-T (Gigabit Ethernet)
IEEE 802.3z	1000Base-X (SX/LX)
IEEE 802.3x	Flow Control
IEEE 802.3ad	Link Aggregation (LACP)
IEEE 802.3az	Energy-Efficient Ethernet
IEEE 802.1Q	VLAN tagging
IEEE 802.1d	Spanning Tree Protocol (STP)
IEEE 802.1w	Rapid Spanning Tree Protocol (RSTP)
IEEE 802.1p	QoS
IEEE 802.1x	Port-based authentication
IEEE 802.1ab	LLDP
Interface	
Ports	24 x 10/100/1000BASE-T, RJ45
	2 x Gigabit SFP port
	1 x Console Port
Features	
Performance	Switch Capacity: 52Gbps
	Forwarding Rate: 38.7Mpps
	Flash Memory: 32MB
	SDRAM: 128MB
	Packet Buffer Memory: 4.1Mbits
	Jumbo Frame: 10KBytes
Connectivity	Mac Address Table: 8K
	Auto-negotiation, Auto MDI/MDI-X, Storm Control, Flow Control, Port Speed Limit (Rate Limit)
VLAN	4094 VLAN IDs available, 256 Active VLAN, Port-based VLAN, MAC-based VLAN, Q-in-Q ACCESS VLAN, TRUNK VLAN, 802.1Q tagged VLAN
Internet Protocol	IPv4, IPv6
IGMP Snooping	IGMP v1/v2/v3 Snooping
MAC Management	MAC address display/inquire, Static MAC settings, MAC address search (Static, Dynamic, Port, MAC)
Loopback Detection	Provides support to enable loop detection
Spanning Tree Protocol	STP, RSTP BPDU Filtering, BPDU Guard, Root Guard, Port Priority
Storm Control	Broadcast/Unknown Unicast/Multicast
Link Aggregation	Maximum 8 ports per group Provides up to 8 groups LACP with dynamic or static
Access Control List	Source MAC Address, Destination MAC Address, Source IP, Destination IP, Source Application, Destination Application, Source Interface, Ethernet Type, VLAN
Xpress Ring	ERPS (G.8032)
QoS	802.1p Priority, DSCP, Priority Queue Schedule Mode, SPQ, WRR, WFQ, Priority/Queue Mapping Support 8 Queues

Features	
Port Mirroring	One-to-one
	Many-to-one Mirroring port transmission, receiving and sending
Port Speed Limit	Egress and ingress speed limit
DHCP Snooping	Prevent illegal DHCP server
ARP Inspection	Prevent the ARP request deception Prevent the ARP reply to cheat
Network Management	RMON, SNMP v1/v2c/v3, IPv4/IPv6 Client, LLDP
Device Management	WEB management interface (GUI), User Account, System Information, System Log, System Upgrade, Configuration Management, SNMP, HTTP, HTTPS, Telnet/SSH, CLI
AAA	Radius
Power	
Power Supply	Internal Power Supply 100-240VAC, 50/60Hz
Mechanical and Environment	
LED Panel	PWR, ALM, POST, LNK/Act, 1000M
Operating Temperature	0°C~60°C
Storage Temperature	-20°C~70°C
Operating Humidity	5 to 95% RH (non-condensing)
Storage Humidity	5 to 95% RH (non-condensing)
Energy Conservation Design	Fanless
Dimension (WxHxD)	440 x 44 x 310mm
Mounting	19" Rack Mount with L-shaped Bracket
Standards and Certifications	
Electromagnetic Compatibility	FCC Class A, CE
	EN 55024/32 Class A, EN 61000-3-2/3
	EN 61000-6-2/4
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-31
Vibration	IEC 60068-2-6
Safety	EN/IEC/UL 60950-1
RoHS	Present
Ordering Information	
PG-4026A	26-Port L2 Managed Gigabit Switch
Optional Accessories	
UT-9125D-00	SFP 1.25G, Multi-mode 850nm, 550m
UT-9125D-10	SFP 1.25G, Single-mode 1310nm, 10km
UT-9125D-20	SFP 1.25G, Single-mode 1310nm, 20km
UT-9113WD-20	SFP 1.25G Bi-Di, TX1310/RX1550, 20km
UT-9114WD-20	SFP 1.25G Bi-Di, TX1550/RX1310, 20km
UT-9125T	SFP 1.25G, 10/100/1000Base-T

### Note :

\* The SFP communication distance upon the request (support 550m to 120km).

\* Specifications subject to change without notice.



AMERICAN STANDARD