



# AC600 Wireless Dual Band PCI Express Adapter

Upgrade Your Desktop with  
Advanced AC Wi-Fi



**Archer T2E**



200 Mbps on 2.4 GHz  
433 Mbps on 5 GHz<sup>†</sup>



MU-MIMO  
Simultaneous data streams<sup>‡</sup>



WPA3  
Advanced security<sup>‡</sup>




Low-Profile and Full  
Height Brackets

# Highlights


## AC600 Dual Band Wi-Fi

Receive Wi-Fi signals on two separate bands for all your online needs. Choose the 2.4 GHz band for browsing, email and social media, or switch to 5 GHz band for gaming and streaming.<sup>†</sup>

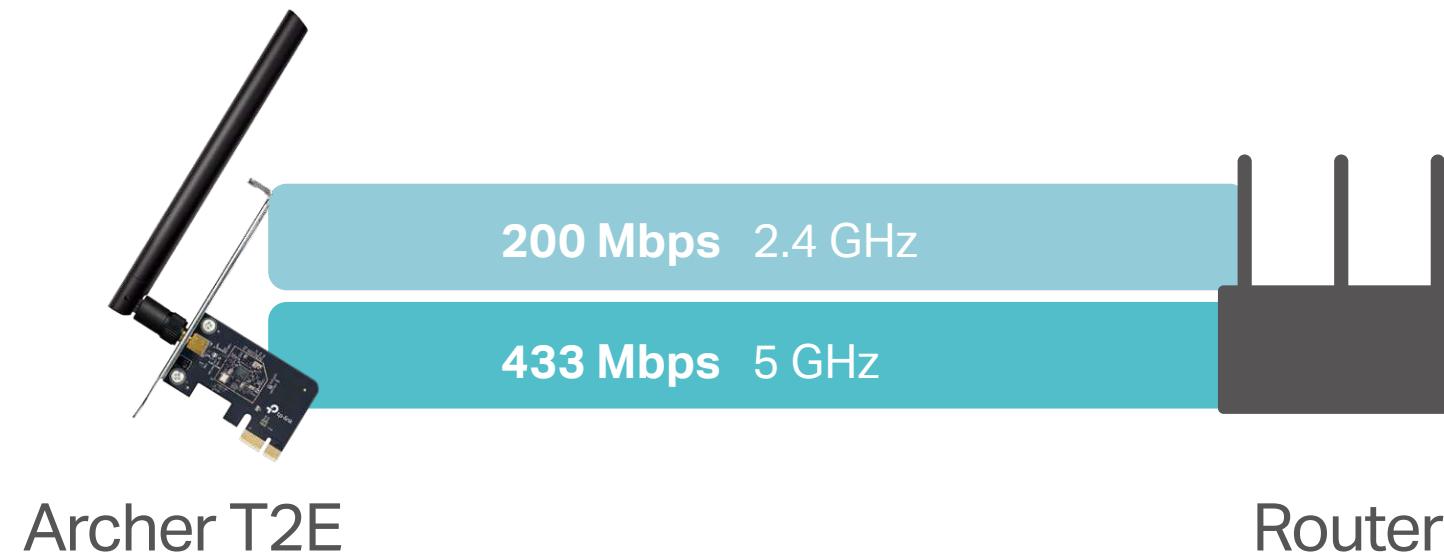

## MU-MIMO for Higher Efficiency

Works with MU-MIMO routers, which provide simultaneous data streams, boosting throughput and efficiency.<sup>‡</sup>

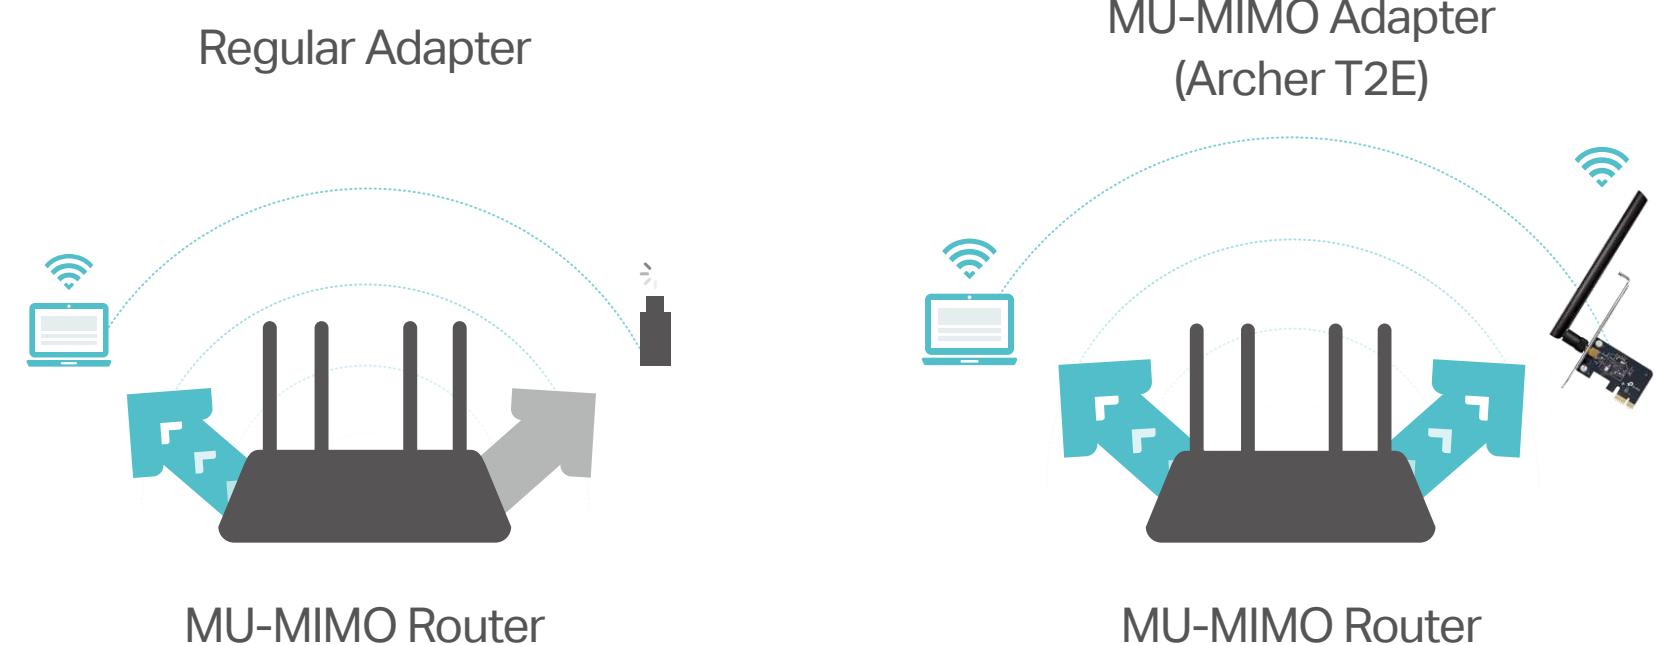

# Highlights

## Improved Security with WPA3

The latest Wi-Fi security protocol provides more secure and individualized encryption in personal password safety, protecting your home Wi-Fi from wireless hacking.<sup>‡</sup>



## Low-Profile Bracket

Alongside a standard bracket, a low-profile bracket is also provided for mini towers. Customized options let you find a bracket that perfectly fits your board design.



# Specifications

## WLAN Features

- Wireless Standards: IEEE 802.11b/g/n 2.4 GHz, IEEE 802.11a/n/ac 5 GHz
- Signal Rate:
  - 5 GHz:
    - 11ac: Up to 433 Mbps(dynamic)
    - 11n: Up to 200 Mbps(dynamic)
    - 11a: Up to 54 Mbps(dynamic)
  - 2.4 GHz:
    - 11n: Up to 200 Mbps(dynamic)
    - 11g: Up to 54 Mbps(dynamic)
    - 11b: Up to 11 Mbps(dynamic)
- Reception Sensitivity:
  - 5GHz:
    - 11ac VHT80MCS9:-69.0dBm
    - 11ac VHT20MCS0:-98.0dBm
  - 2.4GHz:
    - 11n HT40MCS7:-79dBm
    - 11n HT20MCS0:-99dBm
- Transmit Power:
  - 5GHz:20dBm(FCC)/23dBm(CE)(EIRP)
  - 2.4GHz:20dBm(FCC)/20dBm(CE)(EIRP)

# Specifications

## Hardware

- Interface: PCI Express
- Antennas: 1 Detachable External Antenna
- LED: Status
- Dimensions: 4.76 × 3.09 × 0.85 in (120.8 × 78.5 × 21.5 mm)

## Others

- Package Contents  
AC600 Wireless Dual Band PCI Express Adapter  
Archer T2E  
Low-Profile Bracket  
Quick Installation Guide  
Resource CD
- Certification  
FCC, CE, RoHS
- System Requirements  
Windows 10/11<sup>§</sup>
- Environment  
Operating Temperature: 0°C~40°C (32°F ~104°F)  
Operating Humidity: 10%~90% non-condensing  
Storage Humidity: 5%~90% non-condensing



For more information, please visit

[https://www.tp-link.com/products/details/?model=Archer+T2E\\_V2](https://www.tp-link.com/products/details/?model=Archer+T2E_V2)

or scan the QR code left

© 2024 TP-Link

<sup>†</sup>Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of network conditions, AP limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and AP location.

<sup>‡</sup>Use of MU-MIMO and WPA3 requires both the AP and system to support the corresponding features.

<sup>§</sup>To ensure compatibility, you may need to update the adapter's drivers after an OS update. You can find our latest drivers in the download center at [tp-link.com/en/download-center](https://tp-link.com/en/download-center).