

DH-HAC-HFW1500RMP-IL-A-0280B-S3-DIP

Dahua




Dahua DH-HAC-HFW1500RMP-IL-A-0280B-S3-DIP. Dahua Lite Series 4 in 1 Camera Smart Dual Light and Starlight Technology. 5MP@25ips. ICR, 0.005 lux, IR 30 m and white light 30 m. Fixed lens 2.8 mm with 113.3 ° field of view. 3DNR, DWDR, BLC and HLC. Motion detection, privacy masking. Built-in microphone with coaxial audio. DIP switchable CVI/TVI/AHD/CVBS output. Metal body. IP67. Power supply 12V DC ($\pm 30\%$) Dahua 4 in 1 outdoor 5mp camera smart dual light.

Technical Features

- Dahua Lite Series 4-in-1 camera with metal housing
- 5MP CMOS sensor
- Maximum resolution: 2880 × 1620
- Automatic ICR
- Minimum illumination: 0.05 lux (color), 0.005 lux (B/W), 0 lux with IR/white light illumination
- Illumination distance: IR 30 m, White light 30 m
- Fixed lens 2.8 mm
- Viewing angle: H: 113.3°, V: 62.1°, D: 134.3

Video

- Supported Formats: DIP switchable CVI/TVI/AHD/CVBS
- Resolutions: 5MP (2880×1620), 4MP (2560×1440), 1080P (1920×1080), 960H (960×576/480), TVI 5MP 16:9 (2960×1665)
- Frames per second:
 - CVI: 5MP@25ips, 4MP@25ips, 1080P@25ips
 - TVI: 5MP 16:9@20ips
 - AHD: 4MP@25ips
 - CVBS: 960H

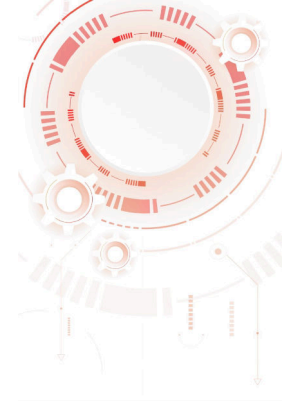

- Day/night modes: Auto (ICR) / Color / B/W.
- Image functions: BLC, HLC, DWDR, 3DNR, Mirror.
- Motion detection
- Privacy masking (up to 8 areas)
- Illumination modes: Smart IR & WL, WL only, IR only

Audio

- Built-in microphone
- Coaxial audio transmission (CVI, TVI)

Power supply

- 12V DC ($\pm 30\%$)
- Maximum power consumption: 4.3 W (with white light on)

Environmental

- Operating temperature: $-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$ ($-40^{\circ}\text{F} \sim +60^{\circ}\text{F}$)
- Humidity: $<95\%$ RH
- IP67 protection

Physical characteristics

- Material: metal
- Dimensions: $166.4 \times 69.7 \times 70.0$ mm
- Net weight: 0.35 kg
- Gross weight: 0.45 kg
- Wall, ceiling or pole installation
- 3AXIS: Pan $0^{\circ} \sim 360^{\circ}$, Tilt $0^{\circ} \sim 90^{\circ}$, Rotate $0^{\circ} \sim 360^{\circ}$

Contents

- 4 in 1 5MP Bullet Camera Smart Dual Light metal **DAHUA-4887** (DH-HAC-HFW1500RMP-IL-A-0280B-S3-DIP)

Certifications

- CE-LVD: EN 62368-1
- CE-EMC: EN 55032, EN 55035

- DAHUA-4887