

# DH-XVR5116H-4KL-I3/T

16CH Penta-brid 4K Value/5MP Mini 1U 1HDD WizSense Digital Video Recorder



WizSense

Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

## Series Overview

The XVR5000-4KL-I3/T series raises the bar on video recorders with its advanced high-resolution design, offering versatility to meet the demands of various applications and projects of different scales and budgets. Its strong compatibility with 5MP cameras ensures the delivery of clear and vivid live video feeds, making it highly recommended for use with 5MP cameras. Loaded with multiple AI functions, such as AcuPick, EPTZ and privacy protection, this series not only streamlines operations but also significantly reduces time and labor costs, contributing to a lower Total Cost of Ownership (TCO).

## Functions

### Two-way talk

Allows for seamless communication between the camera, client and recorder over coaxial cable, and offers instant voice intercom and timely audio alerts.

### Face Recognition

Dahua Face Recognition technology extracts the features of captured faces and compares them with that in face database. \*Face Recognition conflicts with SMD Plus and Perimeter Protection.

\* *Dolynk cloud version: DMSS 2.3.0 and above, Dolynk Care 2.53.00 and above.*

- 16-channel two-way talk over coaxial cable allows for seamless communication between the camera, client and recorder.
- 8-channel AcuPick for analog channels which improves the efficiency of target retrieval.
- 8-channel perimeter protection for analog channels which supports tripwire and intrusion detection powered by AI.
- 4-channel face recognition for analog channels which supports face comparison.
- 16-channel SMD Plus for analog channels or 32-channel SMD by camera which allows the device to trigger accurate alarms for humans and vehicles.
- 16-channel AI Coding saves on storage and bandwidth while maintaining the details of targets in videos.
- Supports HDCVI, AHD, TVI, CVBS and IP video input.
- Supports up to 32-channel IP camera input and each channel can be up to 8 MP. The incoming bandwidth reaches 128 Mbps.
- Supports accessing Wi-Fi cameras, making it suitable for a wide range of scenes.
- Smart H.265+ and H.265 dual-stream video compression.



Two-way talk



Face Recognition



Perimeter Protection



AcuPick



SMD Plus



Enhanced Encoding

### Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

### AcuPick

This industry-leading search technology effectively utilizes back-end intelligence to help with searching through massive video data to quickly and conveniently locate targets with greater precision.

### SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

### Enhanced Encoding

Encoding Enhancement mode optimizes videos through real-time encoding to make them smoother and improve scene rendering.

## Technical Specification

### System

Main Processor	Industrial-grade processor
Operating System	Embedded Linux
Operating Interface	Web; Local GUI

### AcuPick

AcuPick AI by Recorder (Number of Channels)	8 channels
---	------------

### Perimeter Protection

Perimeter Performance AI by Recorder (Number of Channels)	8 channels, 10 IVS rules for each channel
---	---

### Face Detection

Face Attributes	6 attributes
Face Detection Performance of AI by Recorder (Number of Channels)	4 channels (up to 12 face images/s each channel)

### Privacy Protection

Privacy Protection Performance of AI by Recorder (Number of Channels)	1 channel
---	-----------

### Face Recognition

Face Database Capacity	Up to 10 face databases with 20,000 images.
Face Recognition Performance of AI by Recorder (Number of Channels)	4 channels

### SMD

SMD Plus by Recorder	16 channels: Secondary filtering for human and vehicle, reducing false alarms caused by leaves, rain and lighting condition change
SMD by Camera	32 channels

### AI Video Quality Analytics

AI Video Quality Analytics by Recorder	16 channels: Supports detecting brightness levels, color cast, defocus, overexposure, contrast levels, black and white.
--	---

### Scene Changing

Scene Changing by Recorder	1 channel
----------------------------	-----------

### Irregular Black Block Masking

Irregular Black Block Masking by Recorder	1 channel
---	-----------

### EPTZ

EPTZ by Recorder	1 channel
------------------	-----------

### Audio and Video

Analog Camera Input	16 BNC ports, supports HDCVI/AHD/TVI/CVBS auto-detect
---------------------	---

Camera Input	<p>1. CVI: 4K@25/30 fps; 4K@12.5/15 fps; 6 MP@20 fps; 5 MP@25 fps; 5 MP@20 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps; 720p@50/60 fps.</p> <p>2. TVI: 4K@15 fps; 5 MP(2560 x 1944)@20 fps; 5 MP(2960 x 1665)@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps.</p> <p>3. AHD: 4K@15 fps; 5 MP@20 fps; 4 MP@25/30 fps; 3 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps.</p>
--------------	---

IP Camera Input	<p>Up to 32 channels of IPC access 16 IP channels by default + 16 channels (analog channels are converted to IP channels) Incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps and outgoing bandwidth: 128 Mbps *After IP extension is enabled, EPTZ, Video Quality Analytics, Scene Changing, Face Recognition, Face Detection, Perimeter Protection, AcuPick and Privacy Protection cannot be used.</p>
-----------------	--

Encoding Capacity	<p>Encode Enhancement disabled: Main stream: the 1st, 9th channel 4K@(1 fps-15 fps), others 4K@(1 fps-7 fps); the 1st, 9th channel 6 MP@(1 fps-20 fps), others 6 MP@(1 fps-10 fps); the 1st, 9th channel 5 MP@(1 fps-25 fps), others 5 MP@(1 fps-12 fps); the 1st, 9th channel 4 MP/3 MP@(1 fps-25/30 fps), 4 MP/3 MP@(1 fps-15 fps); 4K@(1 fps-8 fps); 4K-N/5 MP@(1 fps-15 fps);4M-N/1080p/720p/960H/D1/CIF@(1 fps-25/30 fps) Sub stream: 960H@(1 fps-15 fps); D1/CIF@(1 fps-25/30 fps) Encode Enhancement enabled: Main stream: the 1st, 5th, 9th, 13th channel 4K@(1 fps-15 fps), others 4K@(1 fps-7 fps); the 1st, 5th, 9th, 13th channel 6 MP@(1 fps-20 fps), others 6 MP@(1 fps-10 fps); the 1st, 5th, 9th, 13th channel 5 MP@(1 fps-25 fps), others 5 MP@(1 fps-12 fps); the 1st, 5th, 9th, 13th channel 4 MP/3 MP@(1 fps-25/30 fps), 4 MP/3 MP@(1 fps-15 fps); 4K/6 MP@(1 fps-10 fps); 4K-N/5 MP@(1 fps-15 fps); 1080p/720p/960H/D1/CIF@(1 fps-25/30 fps) Sub stream: 960H@(1 fps-15 fps); D1/CIF@(1 fps-25/30 fps) *When Encode Enhancement is enabled, EPTZ, Video Quality Analytics, Scene Changing, Face Recognition, Face Detection, Perimeter Protection, AcuPick and Privacy Protection cannot be used.</p>
-------------------	--

Dual-stream	Yes
Video Bit Rate	32 kbps-6144 kbps
Audio Sampling	8 kHz, 16 bit
Audio Bit Rate	64 kbps
Video Output	<p>1 HDMI, 1 VGA HDMI: 3840 x 2160, 1920 x 1080, 1280 x 1024, 1280 x 720 VGA: 1920 x 1080, 1280 x 1024, 1280 x 720 *Simultaneous/heterogeneous video sources output for VGA and HDMI is configurable.</p>
Multi-screen Display	When IP extension mode not enabled: 1/4/8/9/16 When IP extension mode enabled: 1/4/8/9/16/25/36
Third-party Camera Access	Panasonic; Sony; Hanwha; Axis; Arecont; ONVIF

### Compression Standard

Video Compression	AI Coding; Smart H.265+; H.265; Smart H.264+; H.264
-------------------	---

Audio Compression	G.711a; G.711u; PCM
<b>Network</b>	
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; IPv6; RTSP; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; SNMP; Alarm Server; P2P; Auto Registration; IP Search (Supports IP camera, DVR, NVS, etc.)
Mobile Phone Access	iOS; Android
Interoperability	ONVIF 25.06 (Profile T; Profile S; Profile G); CGI; SDK
Browser	Chrome; IE; Safari; Edge; Firefox

**Recording Playback**

Record Mode	General; alarm; motion detection; intelligent; POS
Recording Playback	1/4/9/16
Backup Method	USB device and network
Playback Mode	Instant playback; general playback; event playback; tag playback; smart playback

**Alarm**

General Alarm	Motion detection; alarm box; HDCVI alarm; camera external alarm; network alarm; PIR alarm
Anomaly Alarm	Error (no disk; disk error; low space; low quota space; network disconnection; IP conflict; MAC conflict); video loss; video tampering; camera offline
Intelligent Alarm	Face detection; face recognition; perimeter protection; SMD Plus
Alarm Linkage	Record; snapshot (panoramic); IPC external alarm output; audio; buzzer; log; preset; email

**Ports**

Audio Input	1-channel RCA 16-channel BNC (Coaxial Audio)
Audio Output	1-channel RCA
Two-way Talk	Coaxial two-way talk: 16-channel BNC Local and network user two-way talk: Shares the same audio input with the first channel
Disk Interface	1 SATA port, up to 16 TB. This limit varies depending on the environment temperature.
RS-485	1
USB	2 (1 front USB 2.0 port, 1 rear USB 3.0 port)
HDMI	1
VGA	1
Network Port	1 (10/100/1000 Mbps Ethernet port, RJ-45)

**General**

Power Supply	12 VDC, 3 A
Power Consumption	< 15 W (without HDD)
Net Weight	1.39 kg (3.06 lb)
Gross Weight	2.06 kg (4.54 lb)
Product Dimensions	325.0 mm × 257.1 mm × 55.0 mm (12.80" × 10.12" × 2.17") (W × D × H)
Packaging Dimensions	374.0 mm × 119.0 mm × 311.0 mm (14.72" × 4.68" × 12.24") (W × D × H)

Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Storage Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Operating Humidity	10%–90% (RH), non-condensing
Installation	Desktop
Certifications	CE-LVD: IEC 62368-1:2014 CE-EMC: EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019, EN 55032:2015+A11:2020, EN 55035:2017+A11:2020, EN 55024:2010+A1:2015, EN 50130-4:2011+A1:2014

**Ordering Information**

Type	Model	Description
DIGITAL VIDEO RECORDER	DH-XVR5116H-4KL-I3/T	16CH Penta-brid 4K Value/5MP Mini 1U 1HDD WizSense Digital Video Recorder
Accessories (Optional)	DH-NC300	802.11AX 300M WIRELESS ADAPTER
	DH-NC650	802.11AC 650M WIRELESS ADAPTER
	DHI-ARB1606	Alarm Box

**Accessories**

Optional:



DH-NC300  
802.11AX 300M  
WIRELESS ADAPTER




DH-NC650  
802.11AC 650M  
WIRELESS ADAPTER




DHI-ARB1606  
Alarm Box

**Dimensions (mm[inch])**

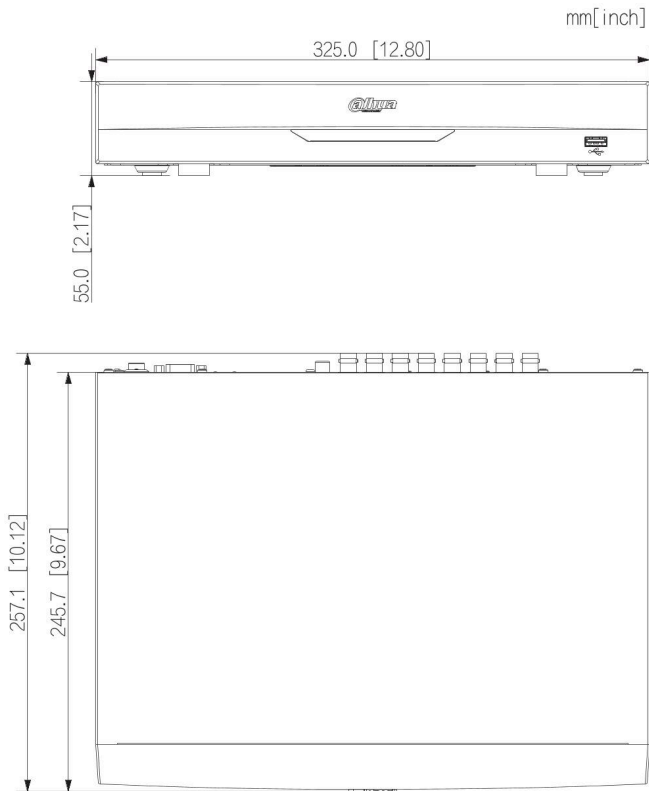

**Panels**

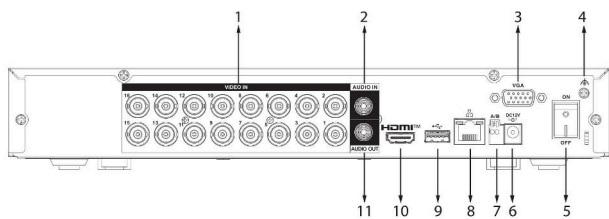

- |                             |                           |
|-----------------------------|---------------------------|
| 1 VIDEO IN                  | 2 AUDIO IN, RCA Connector |
| 3 VGA Port                  | 4 Ground                  |
| 5 Power Switch              | 6 Power Input             |
| 7 RS-485 Port               | 8 Network Port            |
| 9 USB Port                  | 10 HDMI Port              |
| 11 AUDIO OUT, RCA Connector |                           |