

DH-IPC-HFW1239S1-A-LED-S5

2MP Entry Full-color Fixed-focal Bullet Network Camera



- 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 2 MP (1920 × 1080)@25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in warm light, and the max. illumination distance is 15 m.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, audio detection and illegal access.
- Built-in MIC.
- 12 VDC/PoE power supply.
- IP67 protection.



Series Overview

With features of simple installation, easy operation, and high performance-cost ratio, Dahua Entry series network camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

Functions

Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

Full-color

Full-color camera adopts large aperture lens and high performance sensor. With higher amount of absorbed light and advanced image processing algorithm, the camera provides 24/7 color monitoring that collects clear and vivid information, significantly increasing probability of gathering valid human, vehicle, and event evidence that can be used for further intelligent analysis.

Motion Detection

When moving objects appear in the monitoring image, Dahua Motion Detection technology triggers alarm or records.

Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

Protection (IP67, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows $\pm 30\%$ (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification					
Camera					
Image Sensor		1/2.8" CMOS			
Max. Resolution		1920 (H) × 1080 (V)			
ROM		16 MB			
RAM		64 MB			
Scanning System		Progressive			
Electronic Shutter Speed		Auto/Manual 1/3 s–1/100,000 s			
Min. Illumination		0.005 lux@F1.6			
S/N Ratio		>56 dB			
Illumination Distance		15 m (49.21 ft) (Warm light)			
Illuminator On/Off Control		Auto; Manual			
Illuminator Number		1 (Warm light)			
Pan/Tilt/Rotation Range		Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°			
Lens					
Lens Type		Fixed-focal			
Lens Mount		M12			
Focal Length		2.8 mm; 3.6 mm			
Max. Aperture		F1.6			
Field of View		H: 107°; V: 56°; D: 127°; H: 88°; V: 44°; D: 105°			
Iris Control		Fixed			
Close Focus Distance		0.7 m (2.30 ft); 1.3 m (4.27 ft)			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	43.9 m (144.03 ft)	17.5 m (57.41 ft)	8.8 m (28.87 ft)	4.4 m (14.44 ft)
	3.6 mm	58.9 m (193.24 ft)	23.6 m (77.43 ft)	11.8 m (38.71 ft)	5.9 m (19.36 ft)
Video					
Video Compression		H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream)			
Smart Codec		Smart H.265+; Smart H.264+			
Video Frame Rate		Main stream: 1920 × 1080@1–25/30 fps; Sub stream: 704 × 576@1–25 fps; 704 × 480@1–30 fps; *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.			
Stream Capability		2 streams			
Resolution		1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)			
Bit Rate Control		CBR/VBR			
Video Bit Rate		H.264: 32 kbps–6144 kbps H.265: 12 kbps–6144 kbps			

Day/Night	Color/B/W
BLC	Yes
HLC	Yes
WDR	DWDR
White Balance	Auto; natural; street lamp; outdoor; manual; regional custom
Gain Control	Auto; Manual
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 areas, rectangular)
Region of Interest (RoI)	Yes (4 areas)
Smart Illumination	Yes
Image Rotation	0°/90°/180°/270° (Support 90°/270° with 1080p resolution and lower)
Mirror	Yes
Privacy Masking	4 areas
Audio	
Built-in MIC	Yes
Audio Compression	G.711A; G.711Mu; G.726
Alarm	
Alarm Event	Network disconnection; IP conflict; illegal access; motion detection; video tampering; audio detection; security exception
Network	
Network Port	RJ-45 (10/100 Base-T)
SDK and API	Yes
Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; NTP; Multicast; ICMP; IGMP
Interoperability	ONVIF (Profile S); CGI; P2P; Genetec
User/Host	6 (Total bandwidth: 36 M)
Storage	FTP
Browser	IE; Chrome; Firefox
Management Software	Smart PSS; DSS; DMSS
Mobile Client	iOS; Android
Cyber Security	Configuration encryption; Trusted execution; Digest; Security logs; Trusted upgrade; WSSE; Trusted boot; Account lockout; Generation and importing of X.509 certification; Video encryption
Certification	
Certifications	CE-LVD: EN 62368-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B
Power	
Power Supply	12 VDC/PoE (802.3af)
Power Consumption	Basic power consumption: 1.2 W (12 VDC); 2 W (PoE) Max. power consumption (H.265+Warm light intensity): 4.2 W (12 VDC); 5.4 W (PoE)


Environment	
Operating Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Operating Humidity	≤95%
Storage Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Protection	IP67

Structure	
Casing Material	Metal + plastic
Product Dimensions	162.6 mm × 70 mm × 70 mm (6.40" × 2.75" × 2.75") (L × W × H)
Net Weight	0.22 kg (0.49 lb)
Gross Weight	0.34 kg (0.75 lb)


Ordering Information		
Type	Model	Description
2MP Camera	DH-IPC-HFW1239S1-A-LED-S5	2MP Entry Full-color Fixed-focal Bullet Network Camera
	PFA134	Junction Box
	PFA152-E	Pole Mount Bracket
	PFM321D	12 VDC 1A Power Adapter
Accessories (Optional)	PFM900-E	Integrated Mount Tester

Accessories


Optional:




PFA134
Junction Box




PFA152-E
Pole Mount Bracket



PFM321D
12 VDC 1A Power Adapter



PFM900-E
Integrated Mount Tester

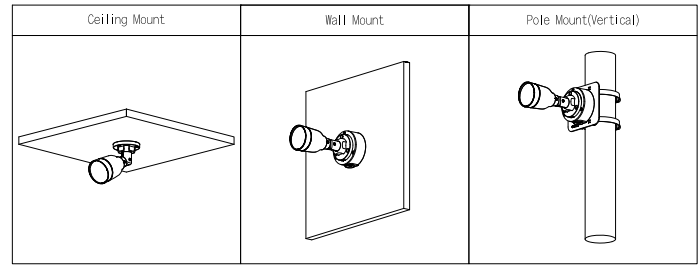

Dimensions (mm[inch])

